

CrystalView DVI Plus™ Addendum


Digital Fiber KVM USB Extender

ROSE.COM

Serial / Audio Model addition



Single video - SingleLink/DualLink USB HID serial audio model

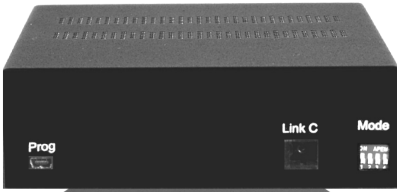

Front view – Transmitter / Receiver

Connectors:
Program
Link C
Mode switches



Rear view – Transmitter


Connectors:
DVI in
USB
Serial / Audio
Power



Rear view – Receiver

Connectors
DVI out
USB
Serial / Audio
Power

Single video - SingleLink/DualLink USB 2.0 serial audio model

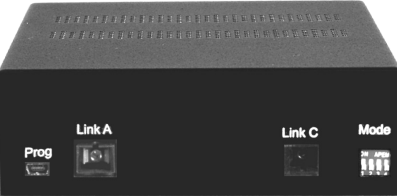

Front view – Transmitter / Receiver

Connectors:
Program
Link A
Link C
Mode



Rear view - Transmitter


Connectors:
DVI IN
USB
Serial / Audio
Power



Rear View – Receiver

Connectors:
DVI out
USB HID
USB 2.0
Serial / Audio
Power

Dual video – SingleLink USB HID serial audio model

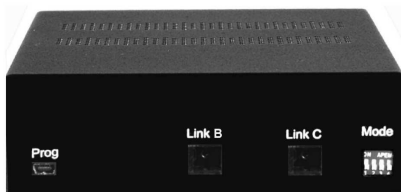

Front view – Transmitter / Receiver

Connectors:
 Program
 Link B
 Link C
 Mode switches



Rear view – Transmitter


Connectors:
 2- DVI in
 USB
 Serial / Audio
 Power



Rear view – Receiver

Connectors
 2-DVI out
 USB
 Serial / Audio
 Power

Dual video – SingleLink USB 2.0 serial audio model

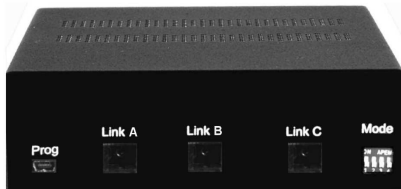

Front view – Transmitter / Receiver

Connectors:
 Program
 Link A
 Link B
 Link C
 Mode



Rear view - Transmitter

Connectors:
 DVI IN
 USB
 Serial / Audio
 Power



Rear View – Receiver

Connectors:
 DVI out
 USB HID
 USB 2.0
 Serial / Audio
 Power

All Serial / Audio models install and connect in the same manor.

Transmitter serial/audio installation

Connect the Transmitter unit's DB9F connector to the computer's DB9M Com port using a standard serial cable (DB9MF).

The Audio In connector on the Transmitter unit is a 3.5mm stereo audio port.

Connect a standard audio cable (male to male) from the transmitter Audio in to the computer's audio out port.

Connect a standard audio cable (male to male) from the transmitter Audio out to the computer's audio in port.

Receiver serial/audio installation

Connect serial equipment's serial cable directly to the DB9M connector on the receiver unit.

Connect a microphone directly to the Audio in port on the receiver.

Connect a headset directly to the Audio out port on the receiver.